

TECHNICAL DATA

SUPREME MASTERAIR

Automatic Hand Dryer 2.0KW



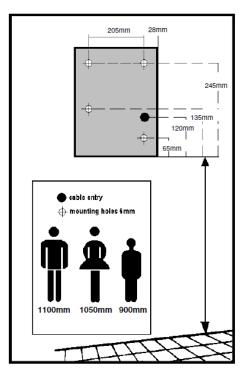

Height recommendations Recommended height to bottom of dryer.

Men's washroom 1100mm Ladies' washroom 1050mm Children's washroom 13-17yrs 1000mm Children's washroom 10-13yrs 950mm Children's washroom 7-10yrs 928mm 4-7yrs Children's washroom 800mm Disabled Person's 950mm

MODEL BA404, BA405, BA407, BA408

Motor Brushless induction, External rotor

Sound Levels 60 dBA @ 1.5m

Element 1.9KW, overheat protection Rating 10 amps @240AC IP23

Start/Stop Infrared sensor with blue light assist

Cover Die cast aluminium—powder coated or stainless steel

Dimensions 290H x 265W x 130D mm

Weight 4.7kg approx.

Warranty Supreme 24 month limited warranty

Standards AS/NZS 60335.2.23, AS/NZS 60335.1:2011

IEC 60335-1:2010

IEC 60335-2-23:2003 + A1 +A2 IEC 62223:2005 + National Deviations

SAMPLE SPECIFICATIONS

Supreme MasterAir Automatic High Speed Hand Dryer

General

Scope—Supply and install Supreme MasterAir hand dryer as shown on the plans.

Materials

Supreme MasterAir automatic hand with color coded aluminium or stainless steel cover.

Workmanship

Remove hand dryer cover by loosening the two allen screws on top of the cover with the key provided. Lift the top of cover away from the base plate by 20mm and then lift bottom of cover away from the base plate locking arms.

Washrooms

Mount at recommended height from floor varies, refer to chart opposite.

Completion

Before fitting the cover, test operation and adjust sensitivity if required by turning the trim pot at the base of machine as per instruction sheet. An ideal detection distance would be approx. 120mm from dryer.

Leave work clean, remove all trade rubbish from the site and leave the hand dryer cleaned and in working order.

Pass over warranties/manuals to the principal.

We reserve the right to alter specifications and design without prior notice



