


GENERAL INFORMATION

Models	Circular Cut-Out Size
XF100	112mm
XF125	140mm
XF150	160mm

Please note: Fan cut out size is a nominal diameter.

DIMENSION INFORMATION (MM)

Models	A	B	C	D	E
XF100	155	98	74	27	155
XF125	168	118	74	27	168
XF150	200	148	74	27	200
XF150PIR	200	148	90	55	200
XF150A/AP	200	148	90	55	200

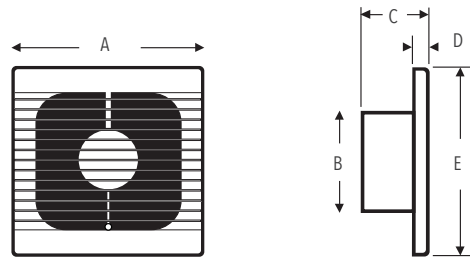


Dimensions - XF


TECHNICAL SPECIFICATION & PERFORMANCE DATA

Models	XF100	XF125	XF150
Power	220 - 240V (LV models 12V)	220 - 240V (LV models 12V)	220 - 240V (LV models 12V)
Fan Performance	23/s, 85m ³ /hr	36 l/s, 130m ³ /hr	101 l/s, 364m ³ /hr*
Fan Wattage	20W	20W	25W
Maximum Pressure	20 Pa	35 Pa	60 Pa
Fan Speed	2400 RPM	2000 RPM	2400 RPM
Sound Level	41 dB(A)	41 dB(A)	40 dB(A)
Max. Operating Temp	50°C	50°C	50°C
IP Rating	IPX4	IPX4	IPX4


*Auto shutter 87 l/s, 313m³/hr installed.

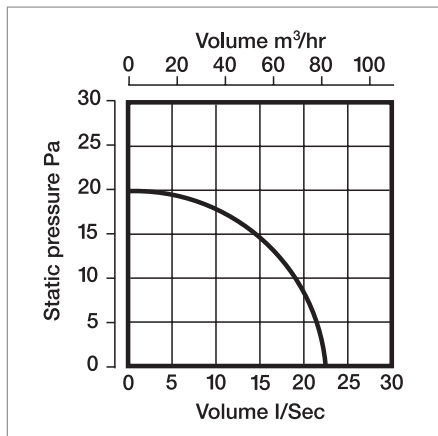

Performance - XF100

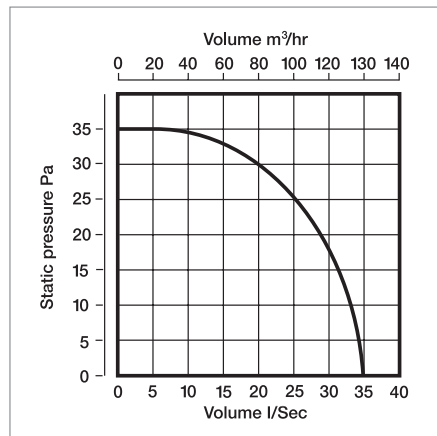

Performance - XF125

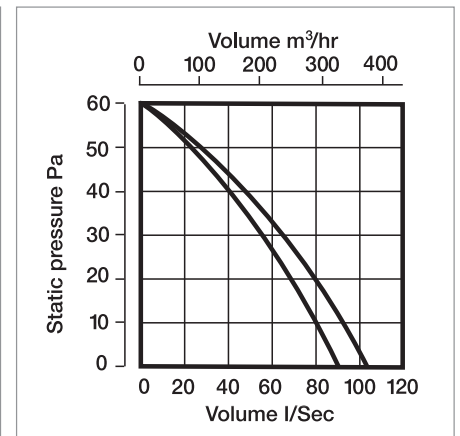


Performance - XF150

GENERAL INFORMATION

Models	Circular Cut-Out Size
XFLP125S	140mm - Using gib fixing clips supplied/included
XFLP125C	140mm - Using gib fixing clips supplied/included
XFLP150S	173mm - Using gib fixing clips supplied/included
XFLP150C	173mm - Using gib fixing clips supplied/included


DIMENSION INFORMATION (MM)

Models	A	B	C	D
XFLP125S	161	122	10	118
XFLP125C	165	122	10	118
XFLP150S	191	122	10	150
XFLP150C	198	122	10	150

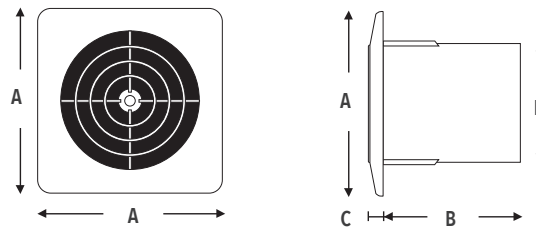


TECHNICAL SPECIFICATION & PERFORMANCE DATA

Models	XFLP125	XFLP150
Power	220 - 240V (SELV models 12V)	220 - 240V (SELV models 12V)
Fan Performance	36 l/s, 130m ³ /hr	101 l/s, 364m ³ /hr
Fan Wattage	20W	25W
Maximum Pressure	35 Pa	60 Pa
Fan Speed	2000 RPM	2400 RPM
Sound Level	41 dB(A)	40 dB(A)
Max. Operating Temp	50°C	50°C
IP Rating	IPX4	IPX4

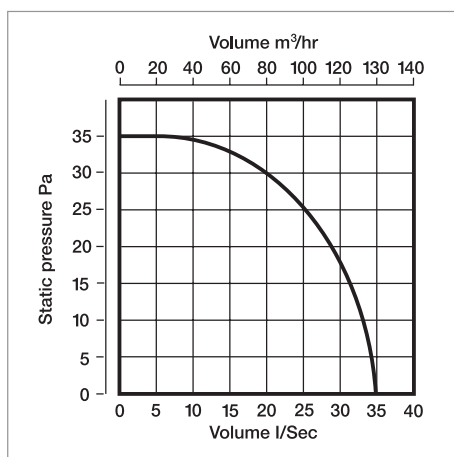

Performance - XFLP125

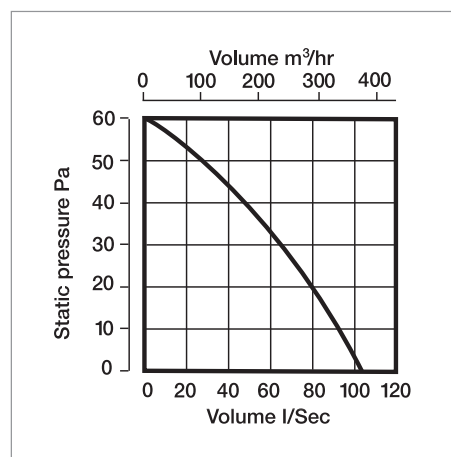

Performance - XFLP150