



MASTER TL5 High Output

MASTER TL5 HO 54W/840 SLV/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Product data

General Information	
Cap base	G5 [G5]
Life to 50% failures preheat (nom.)	30000 h
Features	na [Not Applicable]
System description	High Output (HO)
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	99 %
LSF Preheat 8000 h Rated	99 %
LSF Preheat 16000 h Rated	97 %
LSF Preheat 20000 h Rated	84 %

Light Technical	
Colour Code	840 [CCT of 4000K (841)]
Lamp Luminous Flux 25°C EL (Nom)	5000 lm
Lamp Luminous Flux (Nom)	4500 lm
Colour Designation	Cool White (CW)
Luminous efficacy (@ max. lumen, rated) (nom.)	93 lm/W
Colour Temperature, horizontal (Nom)	4000 K
Lamp Luminous Efficacy EM (Nom)	83 lm/W
Colour Rendering Index, horiz (Max)	85
Colour Rendering Index, horiz (Min)	80
Colour Rendering Index, horiz (Nom)	85

LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

Operating and Electrical	
Power (Rated) (Nom)	54.1 W
Lamp current (nom.)	0.455 A

Temperature	
Design temperature (nom.)	35 °C

Controls and Dimming	
Dimmable	yes

Mechanical and Housing	
Cap base information	Green Plate

Approval and Application	
Energy efficiency label (EEL)	A+

MASTER TL5 High Output


Mercury (Hg) content (nom.)	1.4 mg
Energy Consumption kWh/1000 h	59 kWh
Product Data	
Full product code	871150064318655
Order product name	MASTER TL5 HO 54W/840 SLV/40
EAN/UPC – product	8711500643186
Order code	927929084055

Local Code	TL554W840HO
Numerator – quantity per pack	1
Numerator – packs per outer box	40
Material no. (12NC)	927929084055
Net weight (piece)	105.800 g
ILCOS Code	FDH-54/40/1B-L/P-G5-16/1150

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO 54W/840 SLV/40	17 mm	1149.0 mm	1156.1 mm	1153.7 mm	1163.2 mm

TL5 HO 54W/840

Photometric data

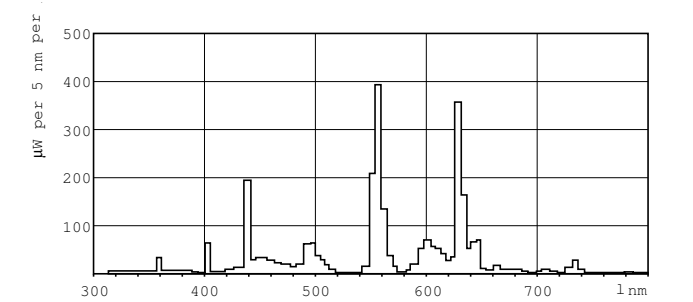

Lightcolour /840

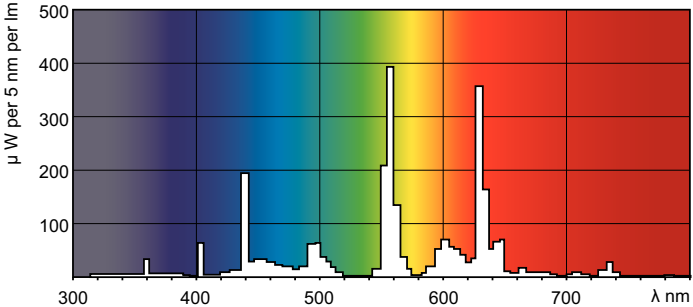

Lightcolour /840

MASTER TL5 High Output

Lifetime

