

Real professionals count on the new **Philips CoreLine Batten**.

These battens deliver superior performance, output and energy efficiency in an affordable package. With a host of built in features, the BN126 is an ideal retrofit solution for the vast majority of applications.

Key Features and Benefits

- ✓ Emergency Options Available (AS2293 Compliant)
- ✓ Surface mount with no visible brackets
- ✓ Included joiner plate for economical continous lighting applications for two or more battens
- ✓ Excellent replacement for T8 and older battens
















Simple installation

Speed, ease of use and choice of installation method is key with features such as;


- ✓ Knock outs in each end for either continuous lighting applictions or in/out wiring
- ✓ Central or end fed
- ✓ Large terminal block with two terminals for each input

Dimensions

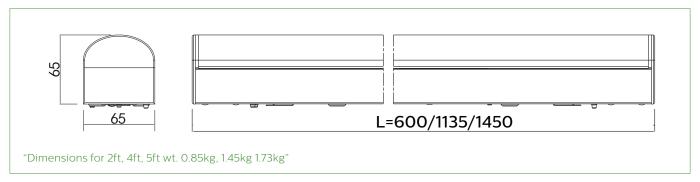

Dimensions shown above are nominal measurements. Slight variations in dimensions may occur in production

Polar intensity

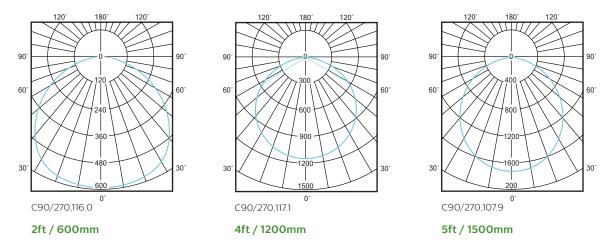

Order codes for the CoreLine Batten

Specification	Part Number		Shortcode
60W, 6000lm, 4000K, 5ft	911401899180	BN126C LED60S/840 PSU L1500 CL	BN12660L8405FT
60W, 6000lm, 6500K, 5ft	911401899280	BN126C LED60S/865 PSU L1500	BN12660L8655FT
60W, 6000lm, 4000K, 5ft	911401823581	BN126C LED60S/840 PSU L1500 EM	BN12660L8405FEM
40W, 4100lm, 4000K, 4ft	911401898980	BN126C LED41S/840 PSU L1200 CL	BN12641L8404FT
40W, 4100lm, 6500K, 4ft	911401899080	BN126C LED41S/865 PSU L1200	BN12641L8654FT
40W, 4100lm, 4000K, 4ft	911401823381	BN126C LED41S/840 PSU L1200 EM	BN12660L8404FEM
20W, 2200lm, 4000k, 2ft	911401898780	BN126C LED22S/840 PSU L600 CL	BN12622L8402FT
20W, 2200lm, 6500k, 2ft	911401898880	BN126C LED22S/865 PSU L600	BN12622L8652FT

^{*}Note: 'EM' suffix denotes an Emergency specification batten ** Note: 'CL' suffix denotes CoreLine branded packaging