


# CONSTANT CURRENT NON DIMMABLE

DRACC



- Non Dimmable
- 5 Year Warranty
- Constant Current [Series Circuit]
- Operating temp range -20.. +50°C
- SELV Equivalent
- Overload / Short Circuit Protection
- Overheat protection
- Self extinguishing Plastic housing
- Safe no load operation

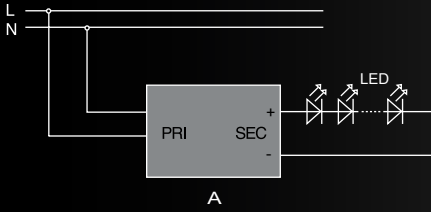

CODE	OUTPUT CURRENT [mA]	MIN/MAX OUTPUT [W]	INPUT VOLTAGE [V]	OUTPUT VOLTAGE [V]	POWER FACTOR [λ]	DIMENSIONS L x W x H [mm]	INGRESS PROTECTION
<b>DRACC350 6W</b>	350mA	3-6W	240V	9-18V	0.55C	L81 x W39 x H22MM	IP20
<b>DRACC350 12W</b>	350mA	1-12W	240V	2-34V	0.80C	L98 x W39 x H22MM	IP20
<b>DRACC350 20W</b>	350mA	1-20W	240V	2-58V	0.80C	L113 x W44 x H28MM	IP20
<b>DRACC350 40W</b>	350mA	13-40W	240V	38-114V	0.95	L142 x W50 x H24mm	IP20
<b>DRACC500 20W</b>	500mA	1-20W	240V	2-40V	0.80C	L113 x W44 x H28mm	IP20
<b>DRACC700 12W</b>	700mA	1.5-12W	240V	2-17V	0.80C	L98 x W39 x H22mm	IP20
<b>DRACC700 21W</b>	700mA	1.5-21W	240V	2-29V	0.80C	L113 x W44 x H28mm	IP20
<b>DRACC700 40W</b>	700mA	1.5-40W	240V	2-57V	0.95	L166 x W52 x H24mm	IP20
<b>DRACC1400 60W</b>	1400mA	36-60W	240V	26-43V	0.95	L184 x W61 x H32mm	IP20