


DRIVERS - CONSTANT VOLTAGE 12V & 24V IP67

**DRACV
DRIPCV**



- Universal AC Input / Full range
- Lab tested 100% Load burn in
- 5 Year Warranty
- Constant Voltage [Parallel Circuit]
- SELV Equivalent
- Operating temp range -20.. +50°C
- Overload / Short Circuit Protection
- Overheat protection
- Protection Class II

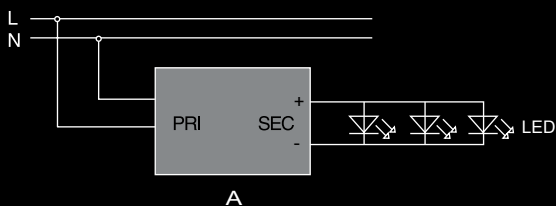

CODE	OUTPUT CURRENT [A]	MAX OUTPUT [W]	INPUT VOLTAGE [V]	OUTPUT VOLTAGE [V]	POWER FACTOR [λ]	DIMENSIONS L x W x H [mm]	INGRESS PROTECTION
DRIPCV12 36W	0 - 3.0A	36W	240V	12V	0.95	L169 x W55 x H30mm	IP67
DRIPCV12 75W	0 - 6.25A	75W	240V	12V	0.95	L186 x W64 x H39mm	IP67
DRACV12 150W	0 - 12.5A	150W	240V	12V	0.95	L223 x W70 x H40mm	IP67
DRACV12 200W	0 - 16.8A	200W	240V	12V	0.95	L249 x W70 x H40mm	IP67
DRIPCV24 36W	0 - 1.5A	36W	240V	24V	0.95	L169 x W55 x H30mm	IP67
DRIPCVP24 36W*	0 - 1.5A	36W	240V	24V	0.95	L169 x W55 x H30mm	IP67
DRIPCV24 75W	0 - 3.15A	75W	240V	24V	0.95	L186 x W64 x H39mm	IP67
DRIPCVP24 75W*	0 - 3.15A	75W	240V	24V	0.95	L186 x W64 x H39mm	IP67
DRACV24 150W	0 - 6.3A	150W	240V	24V	0.95	L223 x W70 x H40mm	IP67
DRIPDACVP24 150W**	0 - 6.3A	150W	240V	24V	0.95	L223 x W70 x H40mm	IP67
DRACV24 200W	0 - 8.4A	200W	240V	24V	0.95	L249 x W70 x H40mm	IP67

*DRIPCVP models supplied pre-wired with 3 pin plug

**DRIPDACV model supplied pre wired with dimmable 1-10V connection