


# CONSTANT VOLTAGE EXTERIOR IP67 12V / 24V

**DRACV  
DRIPCV**



- Universal AC Input / Full range
- Lab tested 100% Load burn in
- 5 Year Warranty
- Constant Voltage [Parallel Circuit]
- SELV Equivalent
- Operating temp range -20.. +50°C
- Overload / Short Circuit Protection
- Overheat protection
- Protection Class II

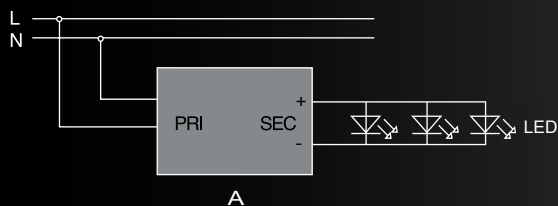

CODE	OUTPUT CURRENT [A]	MAX OUTPUT [W]	INPUT VOLTAGE [V]	OUTPUT VOLTAGE [V]	POWER FACTOR [λ]	DIMENSIONS L x W x H [mm]	INGRESS PROTECTION
<b>DRIPCV12 36W</b>	0 - 3.0A	36W	240V	12V	0.95	L169 x W55 x H30mm	IP67
<b>DRIPCV12 75W</b>	0 - 6.25A	75W	240V	12V	0.95	L186 x W64 x H39mm	IP67
<b>DRACV12 150W</b>	0 - 12.5A	150W	240V	12V	0.95	L223 x W70 x H40mm	IP67
<b>DRACV12 200W</b>	0 - 16.8A	200W	240V	12V	0.95	L249 x W70 x H40mm	IP67
<b>DRIPCV24 36W</b>	0 - 1.5A	36W	240V	24V	0.95	L169 x W55 x H30mm	IP67
<b>DRIPCVP24 36W*</b>	0 - 1.5A	36W	240V	24V	0.95	L169 x W55 x H30mm	IP67
<b>DRIPCV24 75W</b>	0 - 3.15A	75W	240V	24V	0.95	L186 x W64 x H39mm	IP67
<b>DRIPCVP24 75W*</b>	0 - 3.15A	75W	240V	24V	0.95	L186 x W64 x H39mm	IP67
<b>DRACV24 150W</b>	0 - 6.3A	150W	240V	24V	0.95	L223 x W70 x H40mm	IP67
<b>DRIPDACVP24 150W**</b>	0 - 6.3A	150W	240V	24V	0.95	L223 x W70 x H40mm	IP67
<b>DRACV24 200W</b>	0 - 8.4A	200W	240V	24V	0.95	L249 x W70 x H40mm	IP67

\*DRIPCVP models supplied pre-wired with 3 pin plug

\*\*DRIPDACV model supplied pre wired with dimmable 1-10V connection