


CONSTANT VOLTAGE 24V STANDARD



- Universal AC Input / Full range
- 5 Year Warranty
- Captured terminal screws
- Constant Voltage [Parallel Circuit]
- SELV Equivalent
- Operating temp range -20.. +50°C
- Overload / Short Circuit Protection
- Overheat protection
- Self extinguishing Plastic housing
- Protection Class II

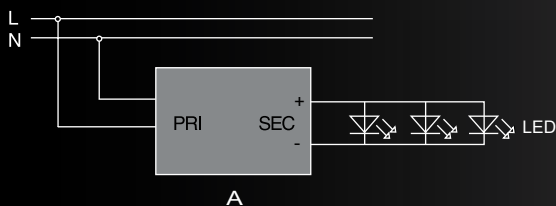

CODE	OUTPUT CURRENT [A]	MAX OUTPUT [W]	INPUT VOLTAGE [V]	OUTPUT VOLTAGE [V]	POWER FACTOR [λ]	DIMENSIONS L x W x H [mm]	INGRESS PROTECTION
DRACV24 20W	0 - 0.83A	20W	240V	24V	0.80C	L113 x W44 x H28mm	IP20
DRACV24 36W	0 - 1.5A	36W	240V	24V	0.95	L166 x W52 x H24mm	IP20
DRACV24 40W	0 - 1.67A	40W	240V	24V	0.95	L166 x W52 x H24mm	IP20
DRACV24 50W	0 - 2.08A	50W	240V	24V	0.95	L184 x W61 x H32mm	IP20
DRACV24 60W	0 - 2.50A	60W	240V	24V	0.95	L184 x W61 x H32mm	IP20
DRACV24 75W	0 - 3.15A	75W	240V	24V	0.95	L184 x W61 x H32mm	IP20
DRACV24 150W	0 - 6.3A	150W	240V	24V	0.95	L223 x W70 x H40mm	IP67
DRACV24 200W	0 - 8.4A	200W	240V	24V	0.95	L249 x W70 x H40mm	IP67