

## Product data sheet

### Characteristics

# XZCRV1511041C5

Jumper cable XZ, male straight M12 4 pin,  
female straight M12 4 pin, PVC 5 m



### Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

### Complementary

Jumper cable end 1	M12 male 4 pins straight connector with screw-on
Jumper cable end 2	M12 female 4 pins straight connector with screw-on
Collar material	Metal
Cable composition	4 x 0.25 mm <sup>2</sup>
Cable length	5 m
Wire insulation material	PVC
Cable outer diameter	4.6 mm
[Ue] rated operational voltage	250 V AC 300 V DC
[In] rated current	3 A
Insulation resistance	>= 1000 MOhm
Maximum resistance across terminals	5000 mOhm
Net weight	0.23 kg

### Environment

IP degree of protection	IP67 IP65
Product certifications	cULus
Ambient air temperature for operation	-25...80 °C static
Ambient air temperature for storage	-25...80 °C

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2 cm
Package 1 Width	17 cm
Package 1 Length	17.5 cm
Package 1 Weight	180 g
Unit Type of Package 2	S02
Number of Units in Package 2	20
Package 2 Height	15 cm
Package 2 Width	30 cm

Package 2 Length	40 cm
Package 2 Weight	3.957 kg
Package 3 Height	15.0 cm


### Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>

### Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

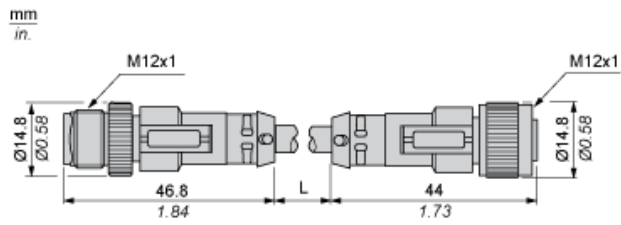

L : Length of cable

---

Connections and Schemes

---

