




"S" RANGE ENCLOSED MAINS SWITCHES


Instructions for use of 20A, 32A, 40A and 63A Enclosed Mains Switches.

WIRING OPTIONS

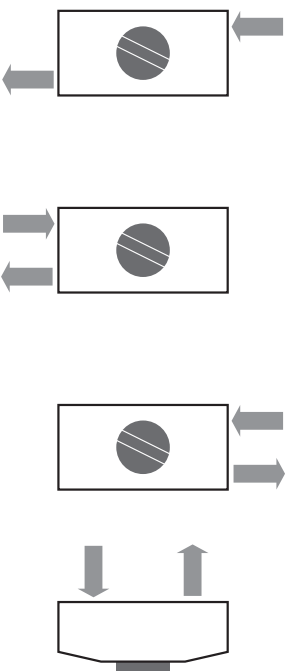

Punch out the appropriate end "knock-outs" or the back "cut-outs".

"LOCK-ON" FEATURE

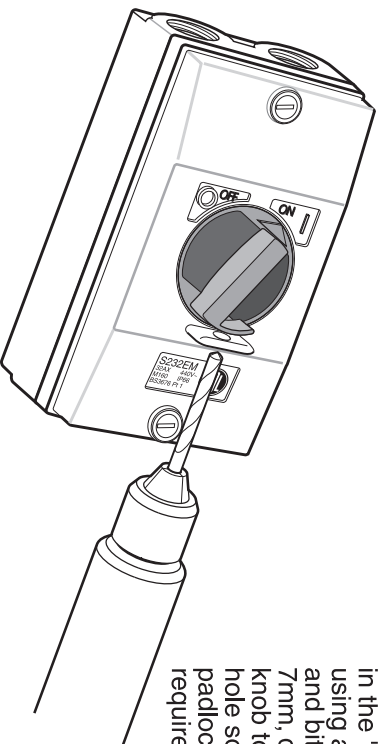

When the switch knob is in the "ON" position, using a slow speed drill and bit no larger than 7mm, drill a hole through knob to align with cover hole so a suitable padlock can be fitted as required.


SEALING FOR ADDED WEATHER PROTECTION

Conduit entry points may require sealing to prevent condensation.

We recommend:

- Dow Corning 732
- Dow Corning 1080
- Dow Corning 739 Plastic Adhesive
- Selleys Window and Glass Sealant
- Ramset RC 804
- Ados Neutral Cure Sealant

THE WIRE SEALING FEATURE

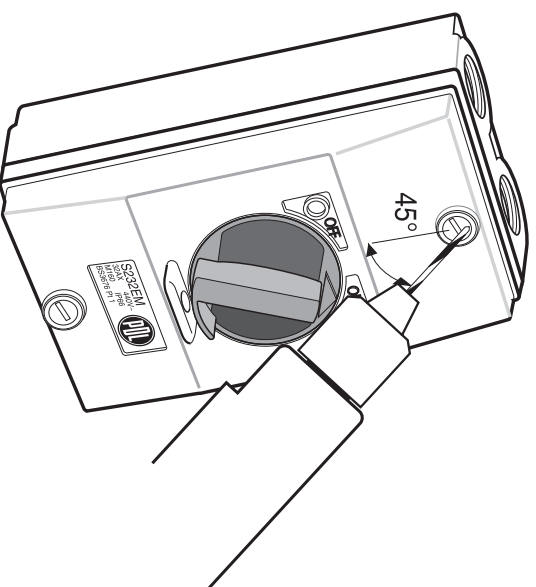

Using a 2mm (or smaller) bit, drill a hole angled at 45° through the side of the enclosure screw and the cover so a wire seal can be fitted.

SPECIFICATIONS

- Pole Configuration:** Single, double, triple.
- Rated current:** 20A, 32A (single, double, triple, and four) 40A, 63A (triple and four)
- Rated voltage:** 240V a.c. 50Hz (Single) 415V a.c. 50Hz (Double, Triple, Four).
- Rated Duty:** Continuous/uninterrupted.
- Overall dimensions:** 165.0mm high x 82.0mm wide x 81.0mm deep
- Conduit Entry:** 2 x 25mm, 4 x 20mm back-entry cut-outs, and 2 x M25 threaded entries each end
- Mounting centres:** Top centre and bottom centre 144.4mm separation.
- Maximum cable size:** 20A & 32A accept 16mm² cable, 40A & 63A accept 25mm² cable.
- Type tested to:** IEC60947-3:2001 AS1939:1990 IP66



Electrical Solutions

New Zealand Head Office:
 PO Box 15 555 New Lynn,
 Waiakare 1040, New Zealand
 Telephone +64(9) 829 0490, Fax +64(9) 829 0491
 www.pdl.co.nz

721400'S Range Enclosed Mains.pdf 4 June 2010

33 - 37 Port Wakefield Rd,
 Coppins Cross, 5094,
 South Australia
 Telephone 1300 20 25 25, Prefax 1300 20 25 56
 Telephone +61 8 8269 0511, Fax +61 8 8340 1724
 www.pdl.com.au

721400




Rev'd 01/12/04



"S" RANGE ENCLOSED MAINS SWITCHES


Instructions for use of 20A, 32A, 40A and 63A Enclosed Mains Switches.

WIRING OPTIONS

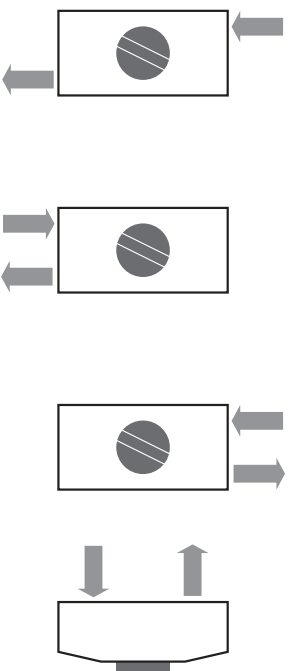

Punch out the appropriate end "knock-outs" or the back "cut-outs".

"LOCK-ON" FEATURE

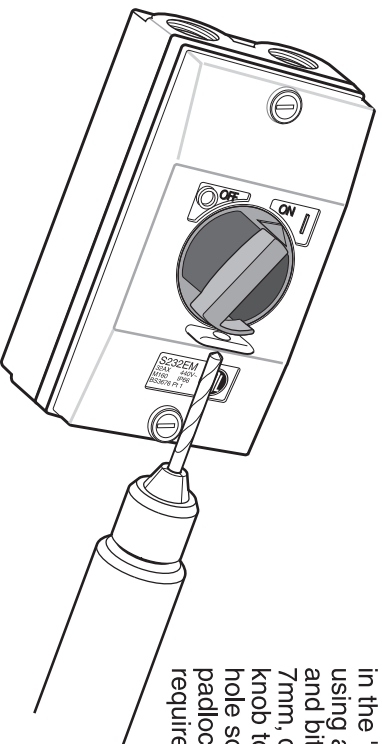

When the switch knob is in the "ON" position, using a slow speed drill and bit no larger than 7mm, drill a hole through knob to align with cover hole so a suitable padlock can be fitted as required.


SEALING FOR ADDED WEATHER PROTECTION

Conduit entry points may require sealing to prevent condensation.

We recommend:

- Dow Corning 732
- Dow Corning 1080
- Dow Corning 739 Plastic Adhesive
- Selleys Window and Glass Sealant
- Ramset RC 804
- Ados Neutral Cure Sealant

THE WIRE SEALING FEATURE

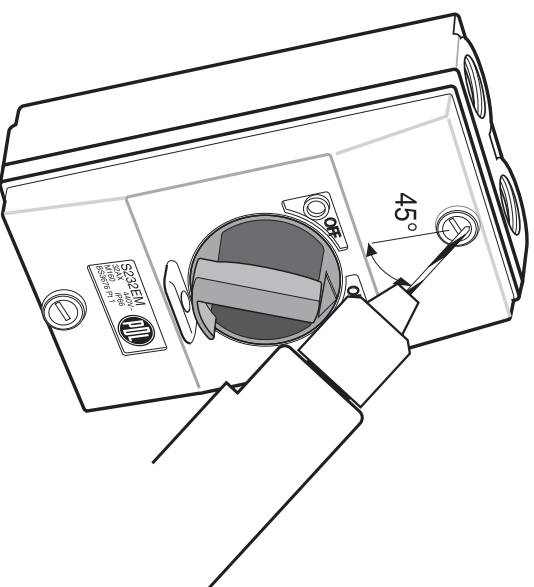

Using a 2mm (or smaller) bit, drill a hole angled at 45° through the side of the enclosure screw and the cover so a wire seal can be fitted.

SPECIFICATIONS

- Pole Configuration:** Single, double, triple.
- Rated current:** 20A, 32A (single, double, triple, and four) 40A, 63A (triple and four)
- Rated voltage:** 240V a.c. 50Hz (Single) 415V a.c. 50Hz (Double, Triple, Four).
- Rated Duty:** Continuous/uninterrupted.
- Overall dimensions:** 165.0mm high x 82.0mm wide x 81.0mm deep
- Conduit Entry:** 2 x 25mm, 4 x 20mm back-entry cut-outs, and 2 x M25 threaded entries each end
- Mounting centres:** Top centre and bottom centre 144.4mm separation.
- Maximum cable size:** 20A & 32A accept 16mm² cable, 40A & 63A accept 25mm² cable.
- Type tested to:** IEC60947-3:2001 AS1939:1990 IP66



Electrical Solutions

New Zealand Head Office:
 PO Box 15 555 New Lynn,
 Waiakare 1040, New Zealand
 Telephone +64(9) 829 0490, Fax +64(9) 829 0491
 www.pdl.co.nz

721400 S Range Enclosed Mains Switch 4 June 2010

33 - 37 Port Wakefield Rd,
 Coppins Cross, 5094,
 South Australia
 Telephone 1300 20 25 25, Prefax 1300 20 25 56
 Telephone +61 8 8269 0511, Fax +61 8 8340 1724
 www.pdl.com.au

721400



Rev'd 0012384