





PE2 SEALING INSTRUCTIONS

To maintain the IP66 rating and to reduce condensation ensure all cable entry points and the bridge is sealed.

Ensure cable entry is IP66 and sealed.

Before fitting bridge apply sealant to slots (see illustration)

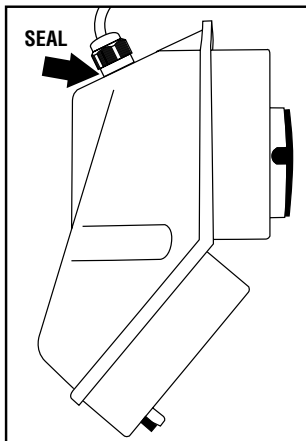

Suitable silicone sealants:

Dow Corning 732
Dow Corning 1080
Dow Corning 739 Plastic Adhesive
Selleys Window and Glass Sealant
Ramset RC 804
Ados Neutral Cure Sealant

WARNING: Use only recommended silicone sealants



P D L

