


Product data sheet

Characteristics

LV429346

standard early make contact, ComPact
NSX100 to NSX630, rotary handle position
CAF, 2 changeover contact types

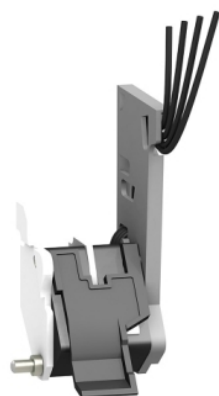

Main

Range of product	ComPact NSX100...250 ComPact NSX100...250 DC ComPact NSX400...630 ComPact NSX400...630 DC
Range	ComPact
Device short name	2 early-make contacts
Product or component type	Auxiliary contact
Device application	Control
Range compatibility	ComPact NSX ComPact NSX DC PowerPact H PowerPact J PowerPact L

Complementary

Auxiliary contacts type	Standard
Auxiliary contacts operation	Early-make
Mounting mode	Drawout
[I _{th}] conventional free air thermal current	6 A
[I _e] rated operational current	AC-12: 6 A at 110 V AC 50/60 Hz AC-12: 6 A at 220/240 V AC 50/60 Hz AC-12: 6 A at 24 V AC 50/60 Hz AC-12: 6 A at 380/440 V AC 50/60 Hz AC-12: 6 A at 48 V AC 50/60 Hz AC-12: 6 A at 480 V AC 50/60 Hz AC-12: 6 A at 660/690 V AC 50/60 Hz AC-15: 0.1 A at 660/690 V AC 50/60 Hz AC-15: 1.5 A at 480 V AC 50/60 Hz AC-15: 2 A at 380/440 V AC 50/60 Hz AC-15: 4 A at 220/240 V AC 50/60 Hz AC-15: 5 A at 110 V AC 50/60 Hz AC-15: 6 A at 24 V AC 50/60 Hz AC-15: 6 A at 48 V AC 50/60 Hz DC-12: 0.3 A at 250 V DC DC-12: 0.6 A at 110 V DC DC-12: 2.5 A at 48 V DC DC-12: 6 A at 24 V DC DC-14: 0.03 A at 250 V DC DC-14: 0.05 A at 110 V DC DC-14: 0.2 A at 48 V DC DC-14: 1 A at 24 V DC
Minimum load	100 mA at 24 V DC

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	66 g
Package 1 Height	4 cm
Package 1 width	6.5 cm
Package 1 Length	8.2 cm

Unit Type of Package 2	S03
Number of Units in Package 2	45
Package 2 Weight	3.489 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------