


## Product data sheet

### Characteristics

# LV432653

current transformer module with voltage output,  
ComPact NSX400/630, 400 A rating, 3 poles

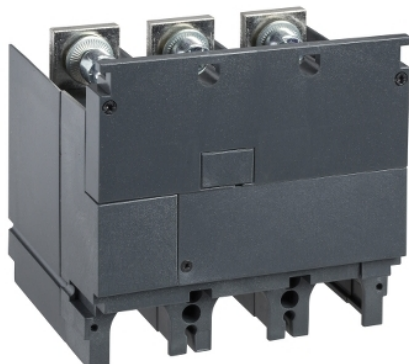

#### Main

Device short name	CT module and voltage output
Product or component type	Current transformer
Device application	Control
Range compatibility	ComPact NSX400 ComPact NSX630
Poles description	3P
[In] rated current	400 A
Current transformer ratio	400/5 A
Power consumption in VA	2 VA
Accuracy class	Class 0.5

#### Complementary

[Ue] rated operational voltage	530 V
Network type	AC
Network frequency	50/60 Hz
Auxiliary connection terminal	Cable connector 2.5 mm <sup>2</sup>

#### Environment

Electrical shock protection class	Class II
IP degree of protection	IP40 conforming to IEC 60529
IK degree of protection	IK04 conforming to IEC 62262

#### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	2.16 kg
Package 1 Height	13 cm
Package 1 width	15 cm
Package 1 Length	20 cm
Unit Type of Package 2	S03
Number of Units in Package 2	2
Package 2 Weight	4.807 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Offer Sustainability

EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>

## Contractual warranty

Warranty	18 months
----------	-----------