


Product data sheet

Characteristics

LV432657

current transformer module, ComPact NSX400/630, 400 A rating, 3 poles

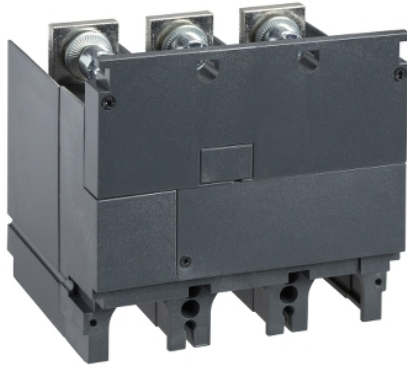

Main

Device short name	Current transformer module
Product or component type	Current transformer
Device application	Control
Range compatibility	ComPact NSX400 ComPact NSX630
Poles description	3P
[In] rated current	400 A
Current transformer ratio	400/5 A
Power consumption in VA	8 VA
Accuracy class	Class 4.5

Complementary

Auxiliary connection terminal	Cable connector 2.5 mm ²
-------------------------------	-------------------------------------





Environment

Electrical shock protection class	Class II
IP degree of protection	IP40 conforming to IEC 60529
IK degree of protection	IK04 conforming to IEC 62262

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	2.214 kg
Package 1 Height	14 cm
Package 1 width	17 cm
Package 1 Length	20 cm
Unit Type of Package 2	S03
Number of Units in Package 2	2
Package 2 Weight	4.915 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration

Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------