

## Product data sheet

### Characteristics

# XZCP1141L10

Pre wired connectors XZ, straight female, M12, 4 pins, cable PUR 10 m



### Main

|                                    |                                  |
|------------------------------------|----------------------------------|
| Range of product                   | Telemecanique Cabling components |
| Accessory / separate part category | Cabling accessory                |
| Accessory / separate part type     | Pre-wired connectors             |
| Series name                        | General purpose                  |

### Complementary

|                                |                                       |
|--------------------------------|---------------------------------------|
| Electrical connection          | Straight female connector M12, 4 pins |
| Cable connector fixing         | Screw-on                              |
| Collar material                | Metal                                 |
| Status LED                     | Without                               |
| Cable length                   | 10 m                                  |
| Cable outer diameter           | 5.2 mm                                |
| Cable composition              | 4 x 0.34 mm <sup>2</sup>              |
| Wire insulation material       | PUR                                   |
| [Ue] rated operational voltage | 250 V AC<br>300 V DC                  |
| [In] rated current             | 4 A                                   |
| Contact resistance             | 5000 µOhm                             |
| Minimum insulating resistance  | 1 GΩ                                  |
| Product weight                 | 0.37 kg                               |

### Environment

|                                       |  |
|---------------------------------------|--|
| IP degree of protection               | IP65<br>IP67<br>IP69K                    |
| Product certifications                | cULus                                    |
| Ambient air temperature for operation | -40...80 °C static<br>-5...80 °C flexing |
| Ambient air temperature for storage   | -40...80 °C                              |

### Packing Units

|                              |       |
|------------------------------|-------|
| Unit Type of Package 1       | PCE   |
| Number of Units in Package 1 | 1     |
| Package 1 Weight             | 306 g |
| Package 1 Height             | 5 cm  |
| Package 1 width              | 18 cm |
| Package 1 Length             | 18 cm |
| Unit Type of Package 2       | S02   |

|                              |          |
|------------------------------|----------|
| Number of Units in Package 2 | 10       |
| Package 2 Weight             | 3.258 kg |
| Package 2 Height             | 15 cm    |
| Package 2 width              | 30 cm    |
| Package 2 Length             | 40 cm    |
| Unit Type of Package 3       | P06      |
| Number of Units in Package 3 | 160      |
| Package 3 Weight             | 59 kg    |
| Package 3 Height             | 77 cm    |
| Package 3 width              | 80 cm    |
| Package 3 Length             | 60 cm    |


## Offer Sustainability

|                            |  |
|----------------------------|--|
| Sustainable offer status   | Green Premium product  |
| REACH Regulation           | <a href="#">REACH Declaration</a>  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes  |
| RoHS exemption information | <a href="#">Yes</a>  |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>  |
| Circularity Profile        | <a href="#">End Of Life Information</a>  |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

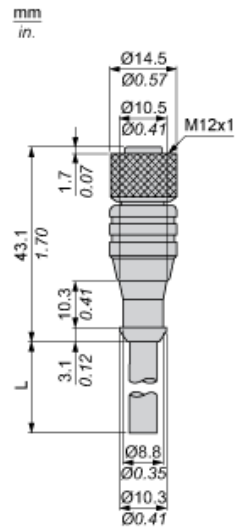


L : Length of cable

---

## Connections and Schemes

---

### Connector



BN : Brown  
BK : Black  
BU : Blue  
WH : White