

PVC Neutral Screened Cables

CU NSCRN 3X 6 3.2

Contact

Sales and Customer Solutions
Phone: 0800 639 267
sales.nz@nexans.com

Nexans Ref.: FAGP11PX003CXRJ


Country Ref.: 8500

Cu conductors, PVC insulation, Cu wire neutral screen, Black PVC sheath. 0.6/1 kV.
Made to AS/NZS 4961.

DESCRIPTION

Application

- Industrial, commercial and domestic applications
- For use in various situations to supply the main power from the point of supply to buildings, equipment, sheds, eg, switch board to main control cabinet, main between floors and buildings, cable cabinet to motor, etc.

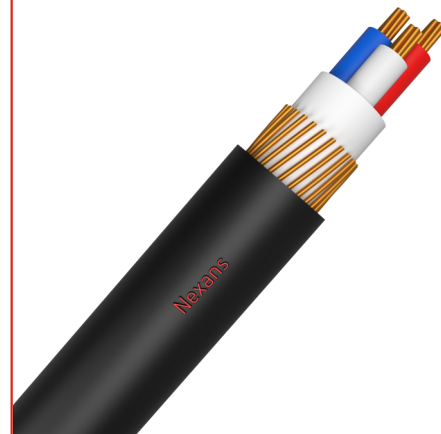

STANDARDS

National AS/NZS 4961

PVC Neutral Screened Cables

CU NSCRN 3X 6 3.2

Contact

Sales and Customer Solutions
Phone: 0800 639 267
sales.nz@nexans.com

CHARACTERISTICS

Construction characteristics

| | |
|--------------------------------|--------------------|
| Pilot wires | None |
| Conductor material | Copper |
| Type of conductor | Circular, stranded |
| Insulation | PVC |
| Screen | Copper wire |
| Outer sheath | PVC |
| Colour | - |
| Conductor flexibility | - |
| Conductor shape | - |
| Core identification | Red, White Blue |
| With Green/Yellow core | No |
| With smaller neutral conductor | No |

Dimensional characteristics

| | |
|--|-------------------|
| Number of cores | 3 |
| Conductor cross-section | 6 mm ² |
| Nominal overall diameter | 19.3 mm |
| Nominal overall diameter | - |
| Gland Size (A2 or A2F) | 32 |
| Gland Size (CX/Z) | 25 |
| Nominal outer sheath thickness | 3.2 mm |
| Approximate weight | 0.56 kg/m |
| Neutral conductor section (when smaller) | - mm ² |

Electrical characteristics

| | |
|---|-----------------|
| Max. DC resistance of the conductor at 20°C | 3.08 Ohm/km |
| Permissible short circuit current conductor 1s | - kA |
| Rated Voltage U ₀ /U (U _m) | 0.6/ 1 (1.2) kV |

Mechanical characteristics

| | |
|-------------------|-------|
| Cable flexibility | Rigid |
|-------------------|-------|

Usage characteristics

| | |
|---------------------------------------|-------|
| Max. conductor temperature in service | 75 °C |
|---------------------------------------|-------|

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 19/06/24 www.nexans.co.nz Page 2 / 3



PVC Neutral Screened Cables













CU NSCRN 3X 6 3.2

Contact

Sales and Customer Solutions
 Phone: 0800 639 267
 sales.nz@nexans.com

CURRENT CARRYING CAPACITIES THREE PHASE (IN AMPS) - THREE & FOUR CORE PVC NEUTRAL

Copper conductor Circular stranded Insulation PVC Max. Conductor Temperature 75C

| Conductor cross-section [mm ²] |  |  |  |  |  |  |
|---|--|---|---|---|---|---|
| | Cu | Cu | Cu | Cu | Cu | Cu |
| 6 | 46 | 42 | 38 | 46 | 46 | 22 |
|  Air Spaced from Surface, Unenclosed |  Air touching, unenclosed |  Air enclosed | |  Buried direct |  Buried in single-way duct |  Cable surrounded by thermal insulation, unenclosed |

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.