


# JULIE LED **EX**



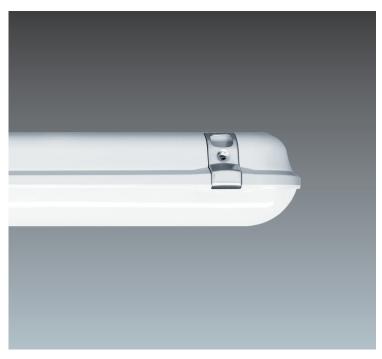

# An IP65 rated LED luminaire for high quality low energy lighting in wet, dusty environments

- High quality opal diffuser ensures uniform lighting without visible spots
- High efficacy, up to 60% energy savings compared to T8 fluorescent
- The traditional design gives an aesthetically pleasing appearance ideal for one to one replacement on refurbishment projects
- $\bullet$  Lengths of 1232mm (4000lm) and 1532mm (4000lm and 6000lm)
- 3hr emergency version available
- 5 year warranty

# **Application**


- Industrial and storage facilities
- Car parks
- Underpasses
- Workshops
- Open plan mezzanine floors


#### **Light source Information**

- $\bullet$  Life time 50 000 hours (@L70B50, Ta 25°C)
- 4000lm(40W), 6000lm(60W), 100Llm/W
- Colour temperature 4000K
- CRI 80
- McAdams 4









## Material/Finish

Canopy: polycarbonate Diffuser: opal polycarbonate Brackets: stainless steel

#### Installation/Mounting

Suitable for surface mounting.

 $5\times30~\text{mm}$  stainless steel self-tapping screws (not included) can be applied to prevent unauthorised opening of the luminaire.

#### **Specification**

To specify state:

Energy saving LED IP65, dust and moisture resistant luminaire with polycarbonate canopy, polycarbonate diffusers and steel toggles, 4000lm (1232mm and 1532mm length)/ 6000lm (1532mm length) options, Ra80, 4000K, Class I, long service life of 50 000 hours with 70% light output.

## Ordering Guide supplied complete with mounting kit

Description	Wt (Kg)	SAP Code	Cat. No.
JULIE 1200 LED IP65 4000 840	1.50	96665577	JU4000Z4F
JULIE 1500 LED IP65 4000 840	1.56	96628396	JU4000Z5F
JULIE 1500 LED IP65 6000 840	1.95	96665580	JU6000Z5F
_			
Emergency versions			
JULIE 1200 LED IP65 4000 840 E3	1.90	96628397	JU4000ZE4F
JULIE 1500 LED IP65 4000 840 E3	1.96	96628397	JU4000ZE5F
JULIE 1500 LED IP65 6000 840 E3	2.35	96665582	JU6000ZE5F
Spare part			
JULIE LED STANDARD ACCESSORY KIT (SPARE PARTS)		96628409	JUACCKIT



