

TRUNKING SYSTEMS

MINI & MAXI TRUNKING




Full range

MINI TRUNKING

Mini trunking is suitable for concealing surface cables within new-build and refurbishment applications. It is designed to be aesthetically appealing whilst providing protection for indoor and busy areas. It offers security for keeping your cables concealed, as well as being user-friendly to access the cables in the future. A full range of compatible fittings in each size are available to complete your trunking system.

SUITABLE FOR • Alarm wiring • Data installations • Offices



Large capacity

MAXI TRUNKING

Maxi trunking is an efficient option for concealing and protecting surface cables in applications which require larger cable-carrying capacity. Complete your trunking system with a range of compatible fittings offering quick and easy installation. Maxi trunking is the perfect solution for an unobtrusive and secure cable management system for your electrical installations.

SUITABLE FOR • Industrial • Agricultural • Commercial




FITTINGS

Marley offer a range of compatible fittings for your trunking system – couplings, corners angles, end pieces and side tees.

Marley Trunking and fittings are manufactured from high quality uPVC, to provide cable management solutions for building fit-outs. Made for indoor and outdoor use, it is highly UV resistant and has a range of features for security and accessibility. It is light weight for easy handling and meets the durability requirements of the New Zealand Building Code.

PRODUCT SNAPSHOT

For a quick guide on key properties for trunking please see the snapshot below. For more detailed technical information please see page 26.

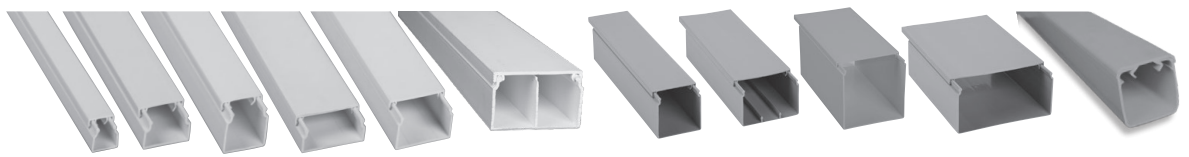

MINI TRUNKING

MAXI TRUNKING

| | | |
|------------------------------------|-----------------------------|--------------|
| COLOURS AVAILABLE | White Brown | Grey |
| MATERIAL | uPVC | uPVC |
| SIZES AVAILABLE*** | 16 - 40mm | 50 - 150mm |
| DUTY RATING* | Light Duty | Heavy Duty |
| IMPACT RESISTANCE* | Medium | High |
| NON-FLAMMABLE* | Yes | Yes |
| UV RESISTANT | White – high Brown – low | Moderate |
| TEMPERATURE RANGE* | 0°C to +60°C | 0°C to +60°C |
| COMPLY WITH AS/NZS STANDARD | 4296 | 4296 |
| CHEMICAL RESISTANCE | High** | High** |
| SUITABLE FITTINGS | Yes | Yes |

* As per manufacturing standard AS/NZS 4296

** Avoid contact with ketones, esters, aromatic and chlorinated solvents

*** Range of depths available