

COLUMN GDL921


SURFACE MOUNTED LED SPOTLIGHT




FEATURES

- Die-cast aluminium body
- Powder coated finish
- Black reflector for better glare control
- High efficiency COB LED chip
- Constant current LED driver included
- Power factor: 0.9
- Colour matching 5 MacAdam steps
- LED lifespan: 50000 hours @ L70 B10, Ta 25°C
- Ta: -30°C to +50°C

IMAGE

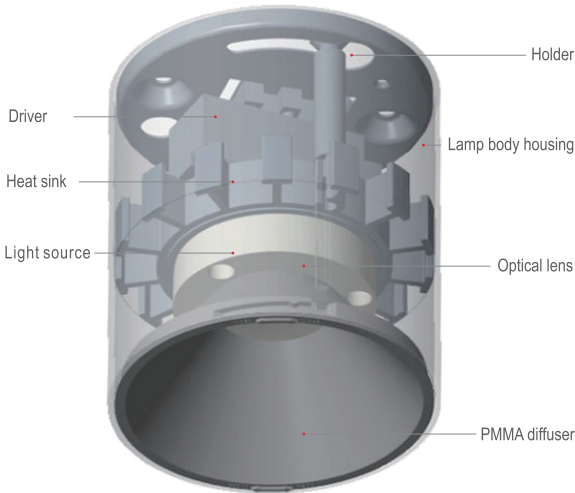

DIMENSIONS

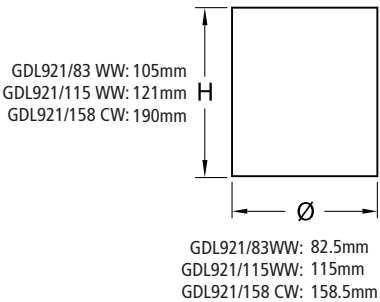

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	OUTPUT CURRENT (mA)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	FITTING COLOUR	CARTON QUANTITY
GDL921/83 WW	230	10	250	800	3000	>82	45	White	48
GDL921/115 WW		20	500	1600	3000	>82			36
GDL921/158 CW		40	1000	3200	4000	>80			12