

GFL701 STARPAD TC

COLOUR TEMPERATURE SELECTABLE LED FLOOD LIGHT



FEATURES


- Select the colour temperature with the integral DIP switch
- Die-cast aluminium body
- Tempered glass front cover
- High performance aluminium reflector
- Constant current LED driver fitted
- Power factor: 0.9
- BMTc LED chips
- 0.6M rubber flex and IP67 copper and nickel plated cable gland
- LED lifespan: 50000 hours @ L70, Ta 25°C
- Ta: -20°C to +40°C

Select the colour temperature with the integral DIP switch



TC SELECTABLE COLOUR
 WARM WHITE 3000K COOL WHITE 4000K DAYLIGHT 5000K

DIMENSIONS

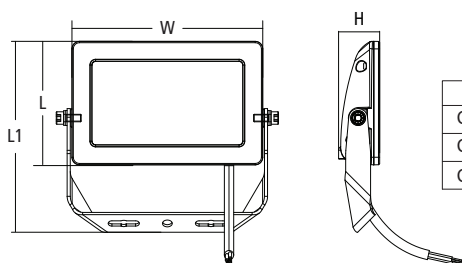

| CODE | L | W | H | L1 |
|------------|-----|-----|------|-----|
| GFL701/30W | 130 | 217 | 40.5 | 224 |
| GFL701/50W | 160 | 270 | 40.5 | 271 |
| GFL701/75W | 205 | 330 | 43.5 | 339 |

Unit: mm

TECHNICAL SPECIFICATIONS

| MODEL NO. | INPUT VOLTAGE (V) | POWER (W) | LUMEN (lm) | COLOUR TEMPERATURE (K) | CRI | BEAM ANGLE (°) | NET WEIGHT (kg) | FITTING COLOUR | CARTON QUANTITY |
|-----------------|-------------------|-----------|----------------|------------------------|-----|----------------|-----------------|----------------|-----------------|
| GFL701/30 TC BK | 230 | 30 | 2550/3300/2700 | 3000/4000/5000 | >80 | 100 | 0.83 | Black | 8 |
| GFL701/50 TC BK | | 50 | 4250/5500/4500 | | | | 1.26 | | |
| GFL701/75 TC BK | | 75 | 6900/8250/7150 | | | | 2.05 | | |

Specifications above are for reference only and may vary without prior notice