

# STARPAD TC

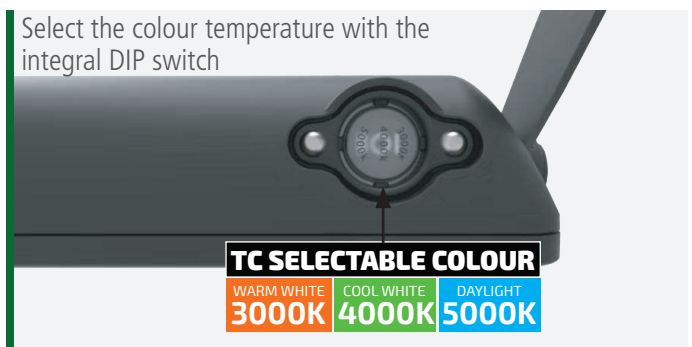
COLOUR TEMPERATURE SELECTABLE LED FLOOD LIGHT

**GFL701**

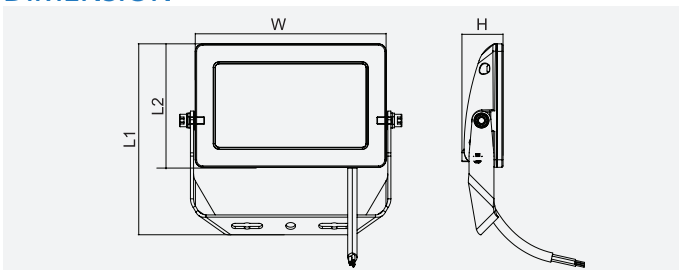

## FEATURES

- Select the colour temperature with the integral DIP switch
- Die cast aluminium body
- Tempered glass front cover
- High performance aluminium reflector
- Constant current LED driver fitted
- 0.6M rubber flex & IP67 copper & nickel plated cable gland
- LED lifespan: 50000 Hours @ L70, Ta 25°C
- Ta: -20°C to +40°C

Select the colour temperature with the integral DIP switch



## DIMENSION



## TECHNICAL SPECIFICATIONS

| MODEL NO.       | INPUT VOLTAGE (V) | POWER (W) | LUMEN (lm)     | COLOUR TEMPERATURE (K) | CRI | BEAM ANGLE (°) | DIMENSIONS (L2×W×H@L1) (mm) | NET WEIGHT (Kg) | FITTING COLOUR | CARTON QUANTITY |
|-----------------|-------------------|-----------|----------------|------------------------|-----|----------------|-----------------------------|-----------------|----------------|-----------------|
| GFL701/30 TC BK | 230               | 30        | 2550/3300/2700 | 3000/4000/5000         | >80 | 100            | 130 x 217 x 40.5 @ 224      | 0.83            | Black          | 8               |
| GFL701/50 TC BK | 230               | 50        | 4250/5500/4500 | 3000/4000/5000         | >80 | 100            | 160 x 270 x 40.5 @ 271      | 1.26            | Black          | 8               |
| GFL701/75 TC BK | 230               | 75        | 6900/8250/7150 | 3000/4000/5000         | >80 | 100            | 205 x 330 x 43.5 @ 339      | 2.05            | Black          | 8               |

Specifications above are for reference only and may vary without prior notice