

QUANTUM

TRI COLOUR AND DUAL WATTAGE LED BATTEN

GBT508



FEATURES

- Pressed steel housing
- Powder coated finish
- Opal polycarbonate LED diffuser
- Constant current LED driver fitted
- Multiple cable entrance position
- Select colour temperature & wattage with DIP switch
- LED lifespan: 50000Hrs @ L70, Ta 25°C
- Ta: -20°C to +40°C

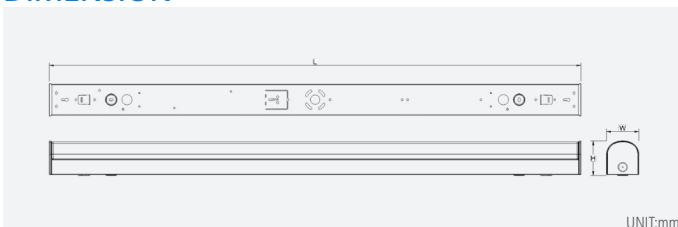
Tri colour temperature settings



Dual wattages settings



DIMENSION



UNIT:mm

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	DIMENSIONS (L×W×H) (mm)	FITTING COLOUR	CARTON QUANTITY
GBT508/120 TC	230	20/40	2200/4400	3000/4000/6000	>80	110	1135 x 69 x 74	White	6
GBT508/150 TC	230	30/50	3300/5500	3000/4000/6000	>80	110	1465 x 69 x 74	White	6

Specifications above are for reference only and may vary without prior notice