

MERCURY COMMERCIAL

DUAL WATTAGE & HIGH EFFICIENCY SMD LED DOWNLIGHT


GDL854/5/6




FEATURES

- Aluminium body
- Powder coated finish
- High transparency diffuser
- Trailing edge dimmable driver included, pre-wired
- Select colour temperature with DIP switch
- Dual wattage setting with DIP switch
- LED lifespan: 50000 Hours @L70, Ta 25°C
- Ta: -20°C to +40°C

DIMENSION

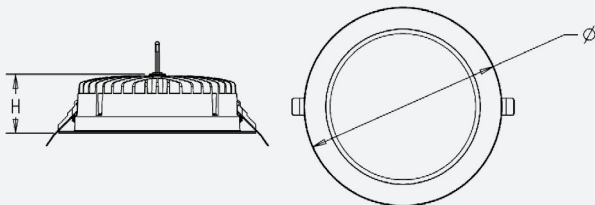

OVERVIEW



Select colour temperature
with DIP switch

• DIP SWITCH

Dual wattage setting
with DIP switch

OPTIONS

- DIMMING:
 - Analogue dimming (1~10V)
 - Digital dimming (DSI, DALI)

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	DIMENSIONS (Ø×H)	CUT OUT SIZE (Ø) (mm)	FITTING COLOUR	CARTON QUANTITY
GDL854 TC WH	230	14/20	1350/1550/1500 2000/2300/2250	3000/4000/5700	>90	100	195 X 66	170	White	12
GDL855 TC WH	230	23/32	2200/2450/2350 3050/3400/3200	3000/4000/5700	>90	100	225 X 66	195	White	12
GDL856 TC WH	230	28/39	2800/3150/3100 3900/4400/4300	3000/4000/5700	>90	100	275 X 66	235	White	10

Specifications above are for reference only and may vary without prior notice