



MASTER TL5 High Efficiency

MASTER TL5 HE 28W/840 SLV/40

This TL5 lamp (tube diameter 16 mm) has a high luminous efficacy, resulting in low energy consumption. The High Efficiency TL5 lamp offers excellent lumen maintenance and good color rendering. Application areas are offices, industry, public and governmental buildings, schools, hospitals and indoor sports lighting.

Product data

General Information			
Cap-Base	G5 [G5]	Luminous Efficacy (Rated) (Nom)	96 lm/W
Life to 50% Failures Preheat (Nom)	24000 h	Color Rendering Index (Max)	85
Features	na [Not Applicable]	Color Rendering Index (Min)	80
System Description	High Efficiency	Color Rendering Index (Nom)	82
LSF Preheat 2000 h Rated	99 %	LLMF 2000 h Rated	96 %
LSF Preheat 4000 h Rated	99 %	LLMF 4000 h Rated	95 %
LSF Preheat 6000 h Rated	99 %	LLMF 6000 h Rated	94 %
LSF Preheat 8000 h Rated	99 %	LLMF 8000 h Rated	93 %
LSF Preheat 16000 h Rated	97 %	LLMF 12000 h Rated	92 %
LSF Preheat 20000 h Rated	84 %	LLMF 16000 h Rated	91 %
		LLMF 20000 h Rated	90 %
Light Technical		Operating and Electrical	
Color Code	840 [CCT of 4000K]	Power (Rated) (Nom)	27.9 W
Luminous Flux (Nom)	2900 lm	Lamp Current (Nom)	0.170 A
Luminous Flux (Rated) (Nom)	2675 lm		
Color Designation	Cool White (CW)		
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	104 lm/W		
Correlated Color Temperature (Nom)	4000 K	Temperature	
		Design Temperature (Nom)	35 °C

MASTER TL5 High Efficiency


Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	Green Plate
Approval and Application	
Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	31 kWh
Product Data	
Full product code	871150063948655

Order product name	MASTER TL5 HE 28W/840 SLV/40
EAN/UPC - Product	8711500639486
Order code	927926584055
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927926584055
Net Weight (Piece)	105.800 g
ILCOS Code	FDH-28/40/1B-L/P-G5-16/1150

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



Dimensional drawing

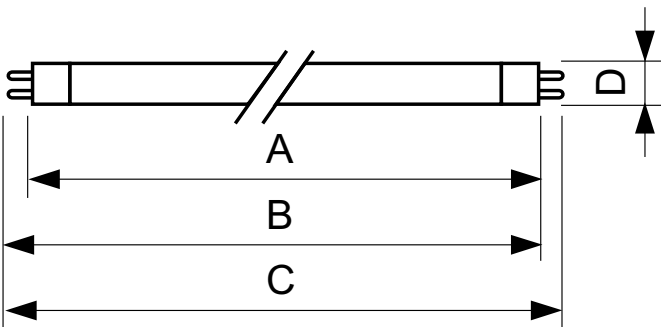

TL5 28W/840/GP HE



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE 28W/840 SLV/40	17 mm	1149.0 mm	1156.1 mm	1153.7 mm	1163.2 mm

Photometric data

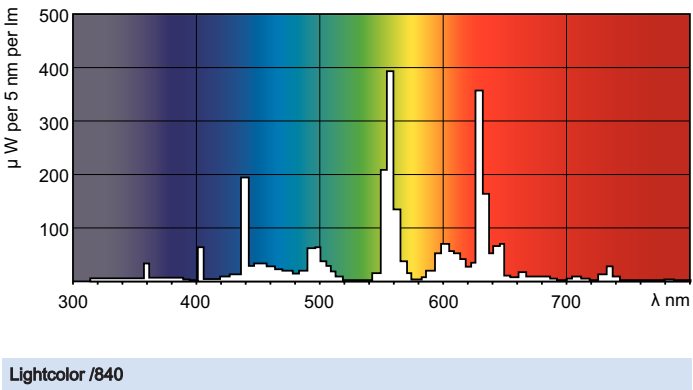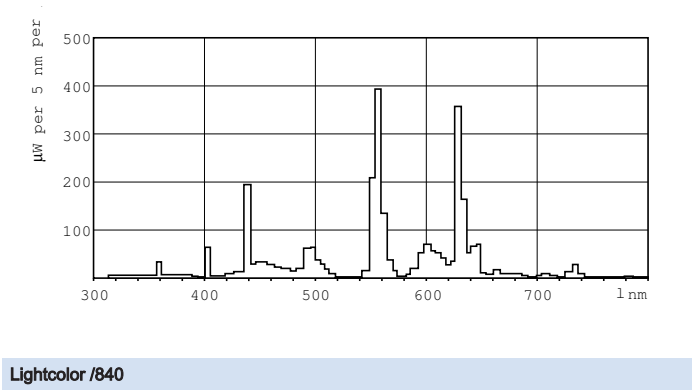


MASTER TL5 High Efficiency

Lifetime

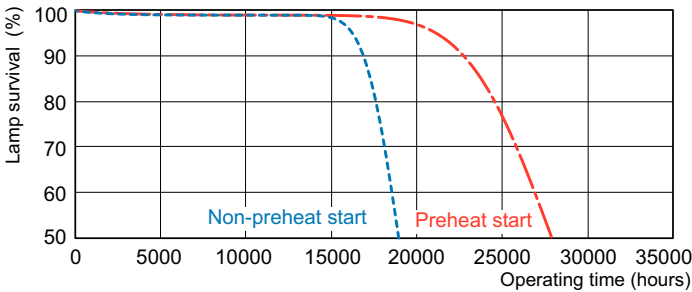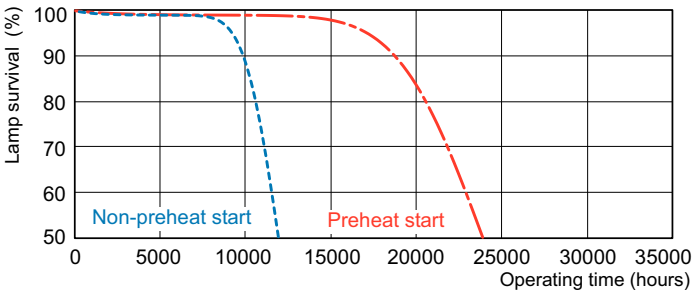

MASTER TL5 HE Life Expectancy 3 h cycle

MASTER TL5 HE Life Expectancy 12 h cycle

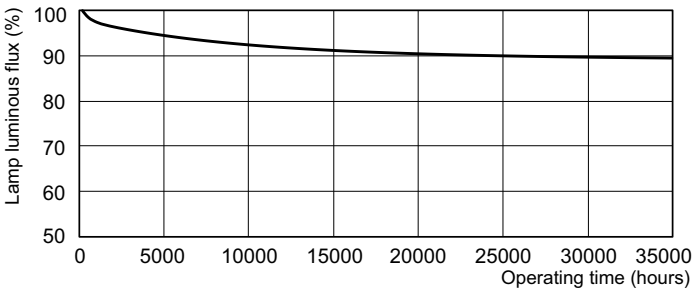

MASTER TL5 HE Lumen Maintenance 3 h + 12 h cycle

