Product Environmental Profile

Wall Box Plastic










Functional unit

General information

Representative product	Wall Box Plastic - 157PD
Description of the product	The wall boxes are used to enclose the electrical accessories, for mounting & installing of 84mm mounting center products in to brick, concrete & stone walls.
	Protect persons during 20 years against direct contact with live parts and allow grouping monitorin

Protect persons during 20 years against direct contact with live parts and allow grouping monitoring, control and protection devices in a single enclosure or a cabinet having the following dimensions 100mm x 64mm x 60mm while protecting against mechanical impacts in accordance with the standard IEC 62262 and the penetration of solid objects and liquids in accordance with the standard IEC 60529 also with relevant standard AS/NZS 60670.

Constituent materials

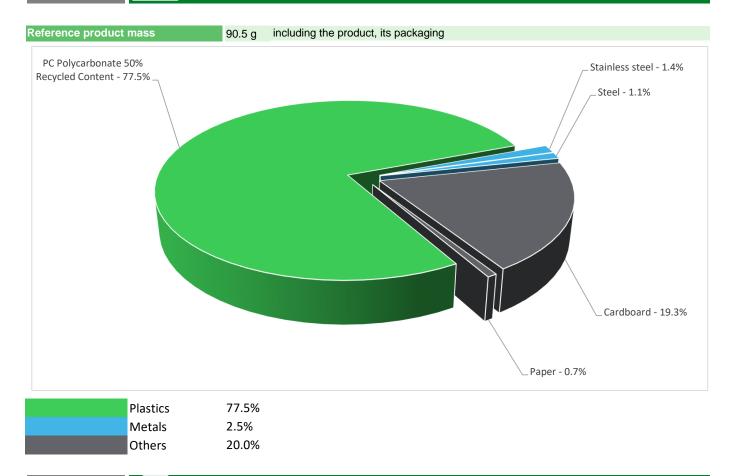

E | Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate - BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page




The Wall Box Plastic presents the following relevent environmental aspects								
Design	Clipsal wall box are made of at least 50% plastic recycled content.							
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified							
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 18 g, consisting of Cardboard(96.67%), Paper(3.33%) Packaging recycled materials is 80% of total packaging mass. Product distribution optimised by setting up local distribution centres							
Installation	This product does not require special installation operation. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal).							
Use	The product does not require special maintenance operations.							
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process.							
	Recyclability potential: Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).							

Environmental impacts

Reference life time	20 years						
Product category	Unequipped enclosures and cabinets						
Installation elements	This product does not requrie any special componets during installation						
Use scenario	No power consumption						
Geographical representativeness	Australia & New Zealand						
Technological representativeness	The Modules of Technologies such as material production, manufacturing process and transport technologies in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production.						
	Manufacturing	Installation	Use	End of life			
Energy model used	Manufacturing Plant Location: Vietnam	Electricity mix; AC; consumption mix, at consumer; 240V; AU	Electricity mix; AC; consumption mix, at consumer; 240V; AU	Electricity mix; AC; consumption mix, at consumer; 240V; AU			

Compulsory indicators	Wall Box Plastic - 157PD						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.06E-06	1.06E-06	1.07E-10	0*	0*	2.20E-10
Contribution to the soil and water acidification	kg SO₂ eq	1.74E-03	1.70E-03	1.57E-05	4.06E-06	0*	2.31E-05
Contribution to water eutrophication	kg PO ₄ 3- eq	2.44E-04	2.31E-04	4.04E-06	9.87E-07	0*	7.59E-06
Contribution to global warming	kg CO ₂ eq	4.85E-01	4.64E-01	2.67E-03	9.74E-04	0*	1.75E-02
Contribution to ozone layer depletion	kg CFC11 eq	1.82E-08	1.76E-08	5.42E-12	2.08E-12	0*	5.64E-10
Contribution to photochemical oxidation	kg C₂H₄ eq	1.37E-04	1.34E-04	4.86E-07	3.03E-07	0*	2.31E-06

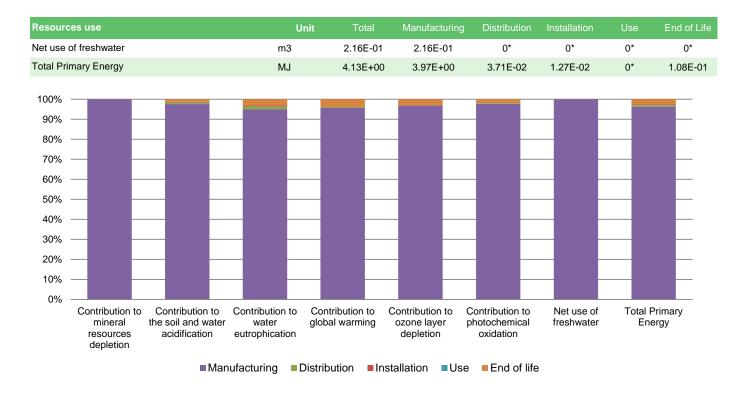

Optional indicators	Wall Box Plastic - 157PD						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2.93E+00	2.79E+00	3.68E-02	1.26E-02	0*	8.67E-02
Contribution to air pollution	m³	2.92E+01	2.81E+01	2.47E-01	3.89E-02	0*	8.02E-01
Contribution to water pollution	m³	2.33E+02	2.32E+02	1.11E-01	1.48E-01	0*	1.09E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	5.54E-02	5.54E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2.46E-01	2.46E-01	0*	0*	0*	1.18E-04
Total use of non-renewable primary energy resources	MJ	3.88E+00	3.72E+00	3.70E-02	1.27E-02	0*	1.08E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1.84E-01	1.84E-01	0*	1.98E-05	0*	1.18E-04
Use of renewable primary energy resources used as raw material	MJ	6.20E-02	6.20E-02	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.68E+00	2.53E+00	3.70E-02	1.27E-02	0*	1.08E-01
Use of non renewable primary energy resources used as raw material	MJ	1.20E+00	1.20E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	2.14E-01	7.13E-02	0*	0*	0*	1.43E-01
Non hazardous waste disposed	kg	4.73E-01	4.72E-01	0*	1.32E-04	0*	3.28E-04
Radioactive waste disposed	kg	2.21E-04	2.21E-04	0*	2.60E-08	0*	5.34E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	3.19E-02	1.19E-02	0*	1.79E-02	0*	2.12E-03
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	3.50E-03	0*	0*	0*	0*	3.50E-03
Exported Energy	MJ	5.69E-05	5.35E-06	0*	5.16E-05	0*	0*

^{*} represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version 5.9.3, database version 2020-12 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP2202022_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	07/2022	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org

Independent verification of the declaration and data

Internal X External

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »

Schneider Electric Industries SAS

Country Customer Care Center

http://www.schneider-electric.com/contact

35, rue Joseph Monier

F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

CS 30323

www.schneider-electric.com

Published by Schneider Electric

ENVPEP2202022_V1 © 2019 - Schneider Electric – All rights reserved

07/2022